




## PROFILE 15x22.5 SLOT 10

Material: anodised aluminium



### Technical data:

Surface A [cm <sup>2</sup> ]	1.30
Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ]	0.80
Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ]	0.30
Section modulus W <sub>x</sub> [cm <sup>3</sup> ]	0.90
Section modulus W <sub>y</sub> [cm <sup>3</sup> ]	0.60
Weight m [kg/m]	0.30

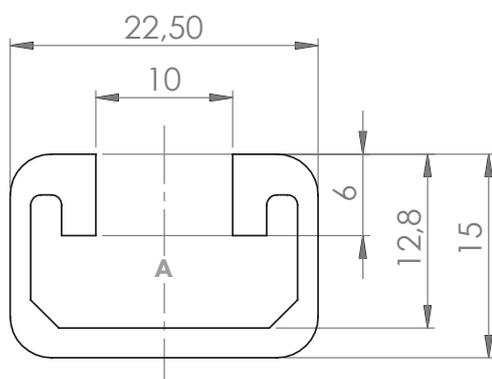

Standard processing:	Art. no.:
D9.8 / -	102300
D9.8 / D9.8	102305
D17 / -	102500
D17 / D17	102505

Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
15x22.5	Cut to length	10	0.3 kg/m	20102700
15x22.5	6060	10	0.3 kg/m	20102701

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP

Material: PA plastic

Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
-	-	-	-	-