


|                                                     |        |
|-----------------------------------------------------|--------|
| Surface A [cm <sup>2</sup> ]                        | 15.50  |
| Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ] | 203.20 |
| Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ] | 27.80  |
| Section modulus W <sub>x</sub> [cm <sup>3</sup> ]   | 33.90  |
| Section modulus W <sub>y</sub> [cm <sup>3</sup> ]   | 13.90  |
| Weight m [kg/m]                                     | 4.20   |

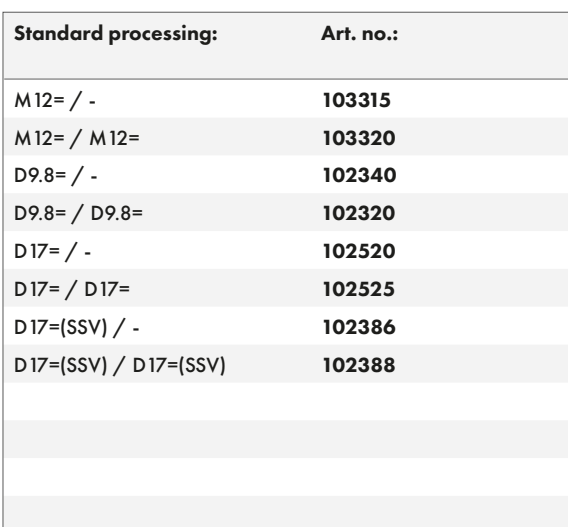

**Explanations and further processing options can be found on p. 223-231**

| Dimensions<br>(version) | Length<br>(mm) | Slot | Weight<br>(kg) | Art. no.: |
|-------------------------|----------------|------|----------------|-----------|
| 40x120L                 | Cut to length  | 10   | 4.2 kg/m       | 20103800  |
| 40x120L                 | 3060           | 10   | 4.2 kg/m       | 20103803  |
| 40x120L                 | 6060           | 10   | 4.2 kg/m       | 20103801  |

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP

**Material:** PA plastic

| Dimensions<br>(version) | Slot | Weight<br>(g) | Version | Art. no.: |
|-------------------------|------|---------------|---------|-----------|
| -                       | -    | -             | -       | -         |
|                         |      |               |         |           |
|                         |      |               |         |           |