





## PROFILE 40x40L 2N180 SLOT 10 (light)

Material: anodised aluminium

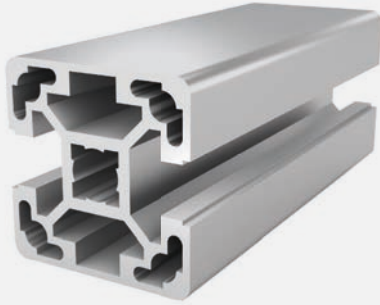

### Technical data:

Surface A [cm <sup>2</sup> ]	5.96
Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ]	10.36
Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ]	9.10
Section modulus W <sub>x</sub> [cm <sup>3</sup> ]	5.18
Section modulus W <sub>y</sub> [cm <sup>3</sup> ]	4.55
Weight m [kg/m]	1.61

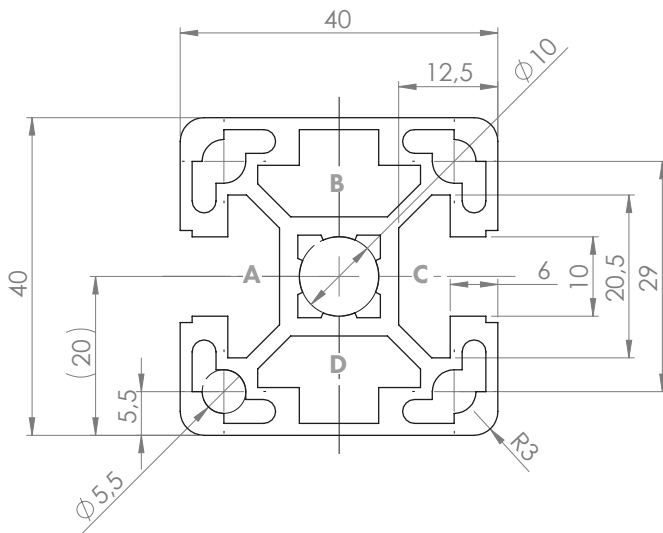

Standard processing:	Art. no.:
M12 / -	103300
M12 / M12	103305
D9.8 / -	102300
D9.8 / D9.8	102305
D9.8+ / -	102315
D9.8+ / D9.8+	102325
D17 / -	102500
D17 / D17	102505
D17(SSV) / -	102380
D17(SSV) / D17(SSV)	102382


Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
40x40L 2N180	Cut to length	10	1.61 kg/m	20101740
40x40L 2N180	6060	10	1.61 kg/m	20101741

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP 40x40 SLOT 10

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
40x40	10	6	Black	401015