





PROFILE 40x80L SLOT 10 (light)

Material: anodised aluminium

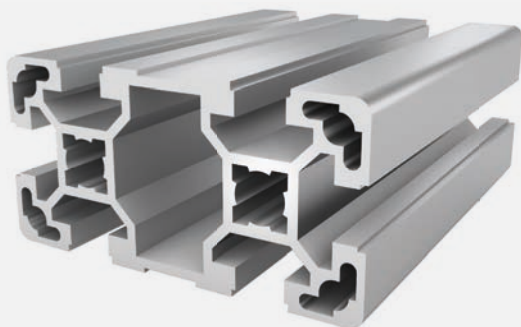

Technical data:

Surface A [cm ²]	9.90
Moment of inertia I _x [cm ⁴]	63.40
Moment of inertia I _y [cm ⁴]	17.30
Section modulus W _x [cm ³]	15.90
Section modulus W _y [cm ³]	8.70
Weight m [kg/m]	2.70

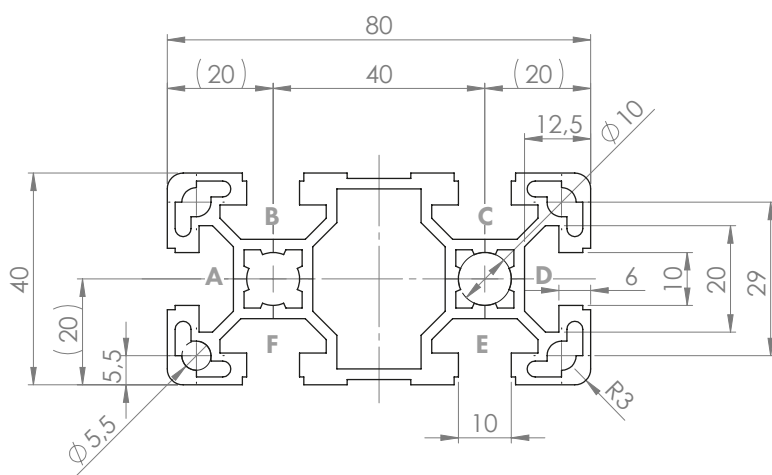

Standard processing:	Art. no.:
M12= / -	103315
M12= / M12=	103320
D9.8= / -	102340
D9.8= / D9.8=	102320
D9.8= / D9.8V	102330
D9.8V / D9.8V	102302
D17= / -	102520
D17= / D17=	102525
D17= / D17V	102535
D17V / -	102510
D17V / D17V	102540
D17=(SSV) / -	102386
D17=(SSV) / D17=(SSV)	102388

Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
40x80L	Cut to length	10	2.7 kg/m	20101900
40x80L	3060	10	2.7 kg/m	20101903
40x80L	6060	10	2.7 kg/m	20101901

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

COVER CAP 40x80 SLOT 10

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
40x80	10	15	Black	401055