





## PROFILE 45x90 SLOT 10

Material: anodised aluminium

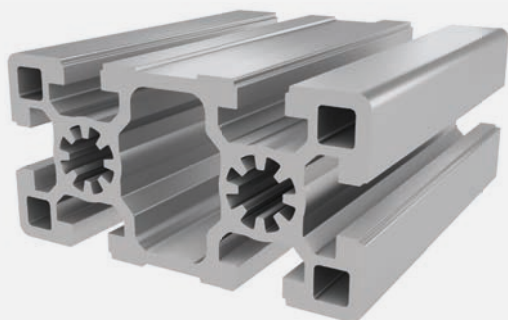

### Technical data:

Surface A [cm <sup>2</sup> ]	15.60
Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ]	125.00
Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ]	32.80
Section modulus W <sub>x</sub> [cm <sup>3</sup> ]	27.70
Section modulus W <sub>y</sub> [cm <sup>3</sup> ]	14.60
Weight m [kg/m]	4.20

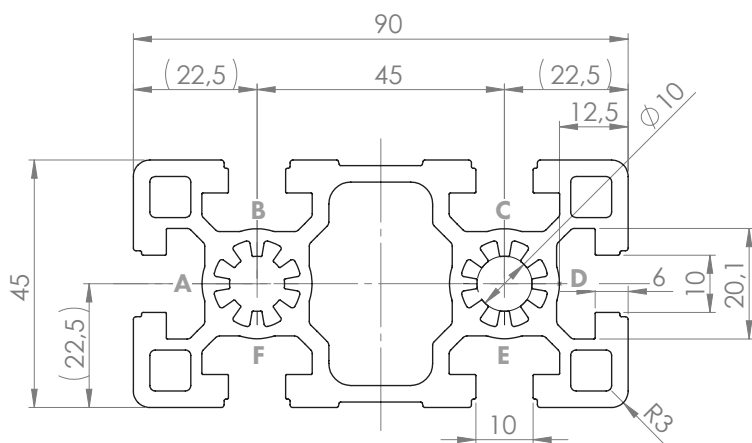

Standard processing:	Art. no.:
M12= / -	103315
M12= / M12=	103320
D9.8= / -	102340
D9.8= / D9.8=	102320
D9.8= / D9.8V	102330
D9.8V / D9.8V	102302
D17= / -	102520
D17= / D17=	102525
D17= / D17V	102535
D17V / -	102510
D17V / D17V	102540

Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
45x90	Cut to length	10	4.2 kg/m	20107000
45x90	3060	10	4.2 kg/m	20107003
45x90	6060	10	4.2 kg/m	20107001

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP 45x90 SLOT 10

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
45x90	10	16	Black	401060
45x90	10	16	Signal grey	401160