





PROFILE 6 30x60L (light)

Material: anodised aluminium

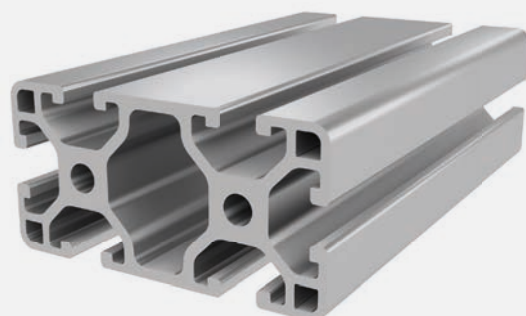

Technical data:

Surface A [cm ²]	6.13
Moment of inertia I _x [cm ⁴]	5.54
Moment of inertia I _y [cm ⁴]	21.22
Section modulus W _x [cm ³]	3.69
Section modulus W _y [cm ³]	7.07
Weight m [kg/m]	1.60

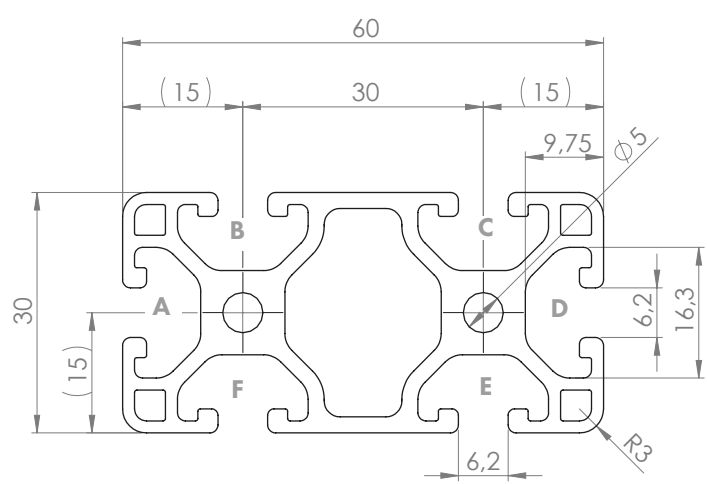

Standard processing:	Art. no.:
M6 / -	103150
M6 / M6	103151
M6= / -	103161
M6= / M6=	103152
D5.8= / D5.8=	102098
D5.8= / D5.8V	102093
D5.8+= / D5.8+=	102088
D16=(Uni) / -	1020403
D16=(Uni) / D16=(Uni)	1020406
D16V=(Uni) / D16V=(Uni)	1020404

Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
30x60L	Cut to length	6	1.65 kg/m	20205000
30x60L	6060	6	1.65 kg/m	20205001

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101010)

COVER CAP 6 30x60

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
30x60	6	5.2	Black	421035