


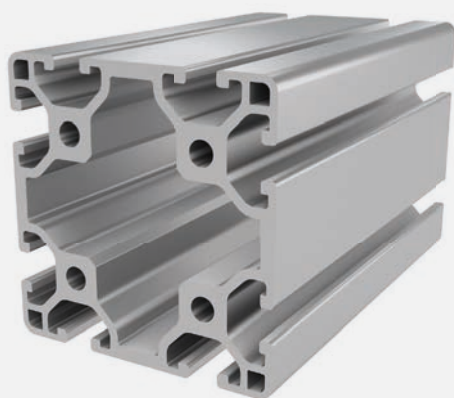


PROFILE 6 60x60L (light)

Material: anodised aluminium

Technical data:

Surface A [cm ²]	10.10
Moment of inertia I _x [cm ⁴]	39.98
Moment of inertia I _y [cm ⁴]	39.98
Section modulus W _x [cm ³]	12.96
Section modulus W _y [cm ³]	12.96
Weight m [kg/m]	2.70

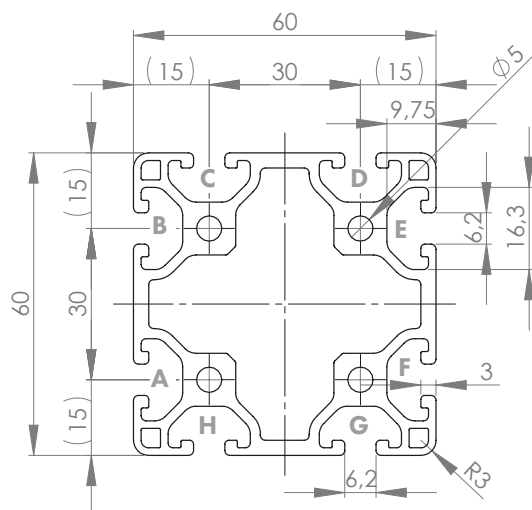

Standard processing:	Art. no.:
M6# / -	103159
M6# / M6#	103153
D5.8# / -	102092
D5.8# / D5.8#	102098
D5.8#+ / -	102103
D5.8#+ / D5.8#+	102088
D5.8# / -	102112
D5.8# / D5.8#	102113
D16=(Uni) / -	1020403
D16=(Uni) / D16=(Uni)	1020406
D16#(Uni) / -	1020402
D16#(Uni) / D16#(uni)	1020407


Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
60x60L	Cut to length	6	2.7 kg/m	20205300
60x60L	6060	6	2.7 kg/m	20205301

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

COVER CAP 6 60x60

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
60x60	6	2.2	Black	421028