


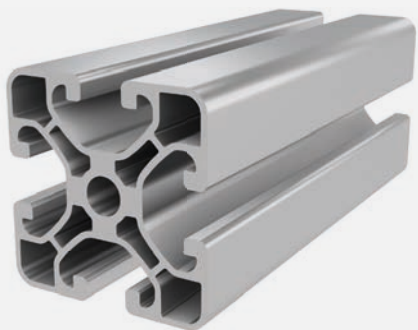


PROFILE 8 40x40 E

Material: anodised aluminium

Technical data:

Surface A [cm ²]	5.07
Moment of inertia I _x [cm ⁴]	7.38
Moment of inertia I _y [cm ⁴]	7.38
Section modulus W _x [cm ³]	3.69
Section modulus W _y [cm ³]	3.69
Weight m [kg/m]	1.37

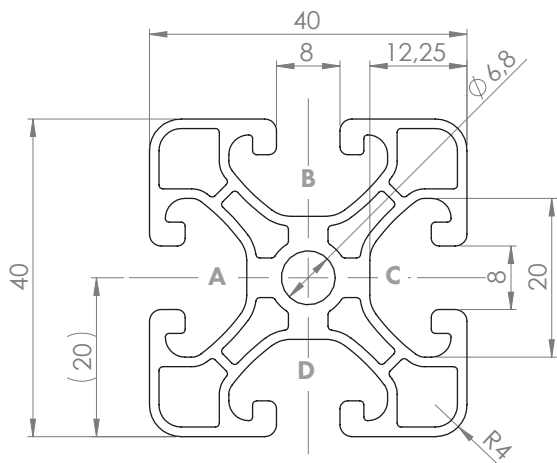

Standard processing:	Art. no.:
M8 / -	103200
M8 / M8	103205
D7 / -	102350
D7 / D7	102351
D7 / D7V	102359
D7+ / -	102352
D7+ / D7+	102353
D14 / -	102450
D14 / D14	102455
D14 / D14V	102475
D20(Uni) / -	1020301
D20 (Uni) / D20 (Uni)	1020302
D20 (Uni) / D20V (Uni)	1020313
D12-15 (SSV) / -	102445
D12-15 (SSV) / D12-15 (SSV)	102446
D12-15 (SSV) / D12-15V (SSV)	102449

Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
40x40 E	Cut to length	8	1.37 kg/m	20207100
40x40 E	3060	8	1.37 kg/m	20207103
40x40 E	6060	8	1.37 kg/m	20207101

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

COVER CAP 8 40x40

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
40x40	8	6	Black	421040
40x40	8	4.8	With hole (Ø10.5), black	421048
40x40	8	6	Grey (similar to RAL 7042)	99900685