


## PROFILE 50x50L SLOT 10 (light)

Material: anodised aluminium

### Technical data:

Surface A [cm <sup>2</sup> ]	9.30
Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ]	21.20
Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ]	21.20
Section modulus W <sub>x</sub> [cm <sup>3</sup> ]	8.50
Section modulus W <sub>y</sub> [cm <sup>3</sup> ]	8.50
Weight m [kg/m]	2.50

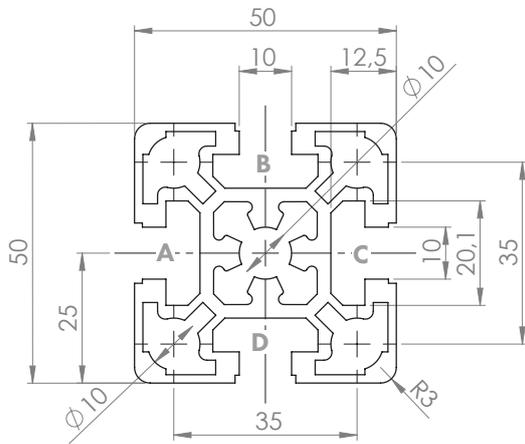

Standard processing:	Art. no.:
M12 / -	103300
M12 / M12	103305
M12 / M16	103310
M16 / M16	103405
D9.8 / -	102300
D9.8 / D9.8	102305
D9.8 / D9.8V	102310
D9.8+ / D9.8+	102325


Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
50x50L	Cut to length	10	2.5 kg/m	20104500
50x50L	6060	10	2.5 kg/m	20104501

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP 50x50 SLOT 10

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
50x50	10	6	Black	401065