



CENTRING PLATE SETS





For connecting two profiles at a 90° angle.


A threaded hole in a profile arranged at the end is required for mounting the item.

The screw must then be fixed through a further hole (accessible for an Allen key through the screw head) in the upright profile as shown here. See the table for suitable drilling measurements.




Screw, pan head, ISO 7380



Screw, pan head, ISO 7380



Centring plate sets, unilateral

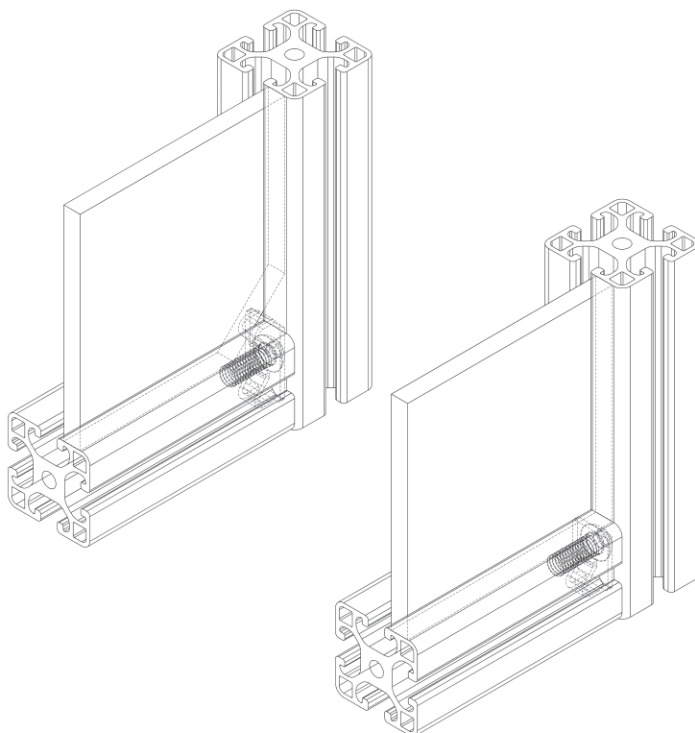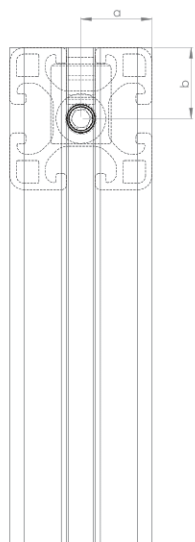

Description	Slot	Thread	a x b	D	L1 (mm)	L2 (mm)	L3 (mm)	L3 (mm)	t (mm)	A1 (mm)	Weight (g)	ESD	Art. no.:
Centring plate set 5	5	M5x12	10 10	Ø 4.3	16.4	19.9	-	-	1	-	4.0		380003
Centring plate set 6	6	M6x16	15 15	Ø 5.5	21	27.5	-	-	1.8	-	10.1		380005
Centring plate set 8	8	M8x20	20 20	Ø 7.0	31	35	-	-	2.2	-	19.9		380010
Centring plate set 8 VA	8	M8x20	20 20	Ø 7.0	31	35	-	-	2.2	-	18.7		380012
Centring plate set 8, unilateral	8	M8x20	20 20	Ø 7.0	-	-	22.3	24.3	2.2	7	17.6		380011