
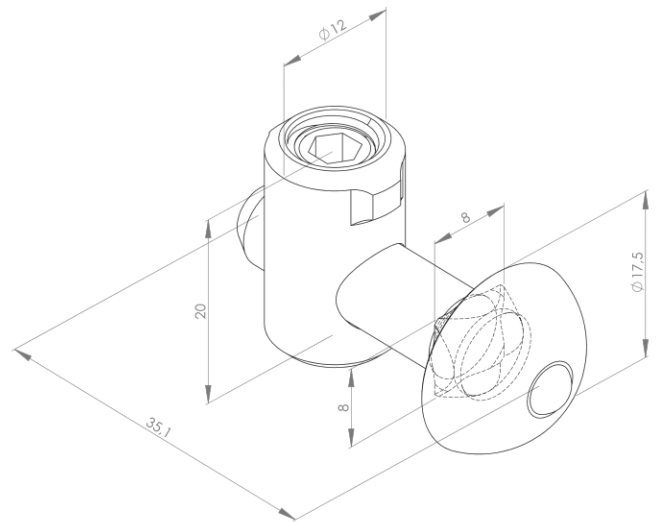


QUICK CONNECTOR WITH ROTATION PREVENTION

Material: Steel, zinc-plated

For connecting two profiles at a 90° angle.

A blind hole $\varnothing 12 \times 20$ in the middle of the profile (20 mm) at a spacing of 15 mm is required to mount this item.

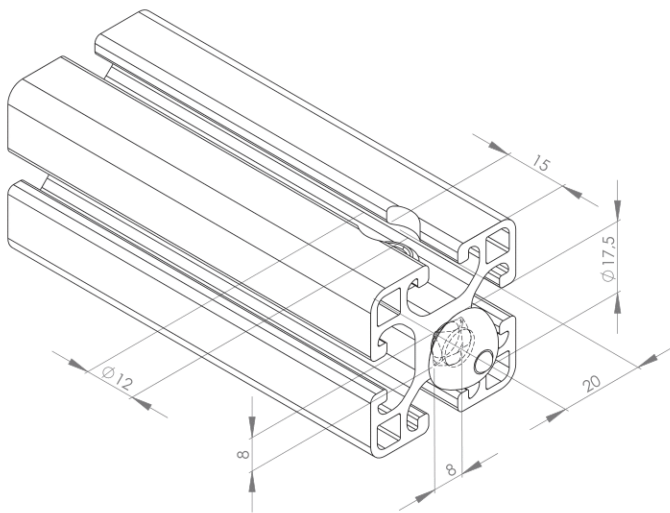

Description	Slot	Version	Weight (g)	ESD	Art. no.:
Quick connector with rotation prevention	8	With rotation prevention	23.0	-	323050