

SWIVELLING DOUBLE T-SLOT NUTS 8

WITH BALL AND BAR




Available with various thread sizes

T-slot nuts can be swivelled into the profile slot or inserted into the end of the profile slot

A spring-loaded ball fixes the T-slot nut in the desired position after it has been swivelled/inserted in place

The bar on the top of the T-slot nut centres the nut in the slot

Available in a conductive (ESD) version

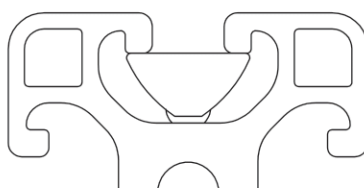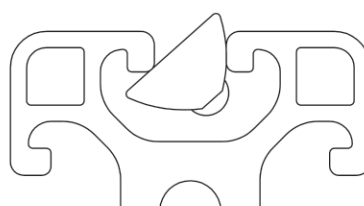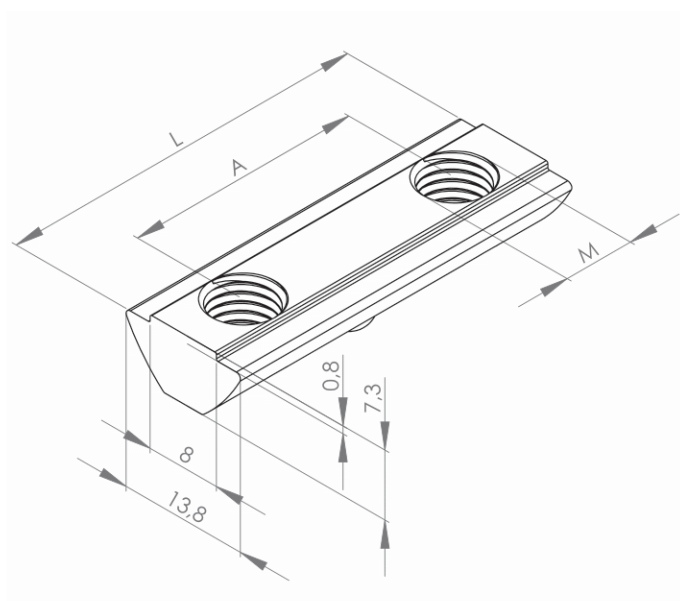

Positioning the T-slot nut

Description	Slot	M (mm)	L (mm)	A (mm)	Material	Weight (g)	ESD	Art. no.:
Swivelling T-slot nut 8 2x M6 L=36 mm with ball and bar	8	6	36	26.4	Steel, zinc-plated	-	-	355045
Swivelling T-slot nut 8 2x M6 L=76 mm with ball and bar	8	6	76	66.4	Steel, zinc-plated	-	-	355057
Swivelling T-slot nut 8 2x M8 L=36 mm with ball and bar	8	8	36	24	Steel, zinc-plated	-	-	355054
Swivelling T-slot nut 8 2x M8 L=40 mm with ball and bar	8	8	40	26	Steel, zinc-plated	-	-	355055
Swivelling T-slot nut 8 2x M8 L=80 mm with ball and bar	8	8	80	65.5	Steel, zinc-plated	-		355056