






SWIVELLING T-SLOT NUT 8 WITH BALL (WITHOUT BAR)



T-slot nuts can be swivelled into the slot or inserted into the end of the profile slot

A spring-loaded ball fixes the T-slot nut in the desired position after it has been swivelled/inserted in place

Available with various thread sizes and as an ESD version.

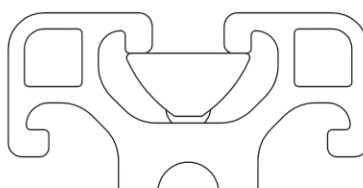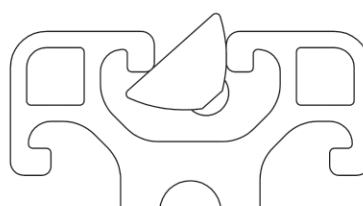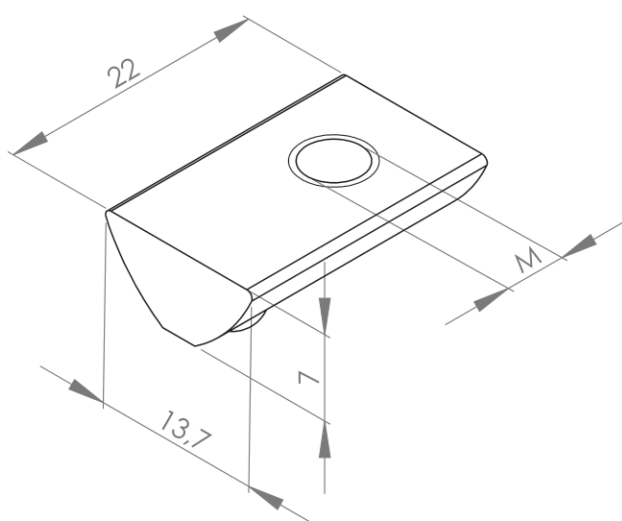

Positioning the T-slot nut

Description	Slot	M (mm)	Material	Weight (g)	ESD	Art. no.:
Swivelling T-slot nut 8 with ball without bar	8	M3	Steel, zinc-plated	10.9	-	998090
	8	M3	Stainless steel	10.9	-	998091
	8	M4	Steel, zinc-plated	10.8	-	998096
	8	M4	Steel, zinc-plated	10.8		998086
	8	M4	Stainless steel	10.8	-	998092
	8	M5	Steel, zinc-plated	10.5	-	998097
	8	M5	Steel, zinc-plated	10.5		998087
	8	M5	Stainless steel	10.5	-	998093
	8	M6	Steel, zinc-plated	9.9	-	998098
	8	M6	Steel, zinc-plated	9.9		998088
	8	M6	Stainless steel	9.9	-	998094
	8	M8	Steel, zinc-plated	9.0	-	998099
	8	M8	Steel, zinc-plated	9.0		998089
	8	M8	Stainless steel	9.0	-	998095