


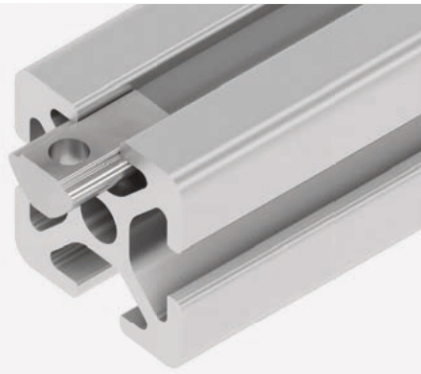



SWIVELLING T-SLOT NUT 8 WITH BALL AND BAR

T-slot nuts can be swivelled into the profile slot or inserted into the end of the profile slot

A spring-loaded ball fixes the T-slot nut in the desired position after it has been swivelled/inserted in place

The bar on the top of the T-slot nut centres the nut in the slot

Available with various thread sizes and as an ESD version.

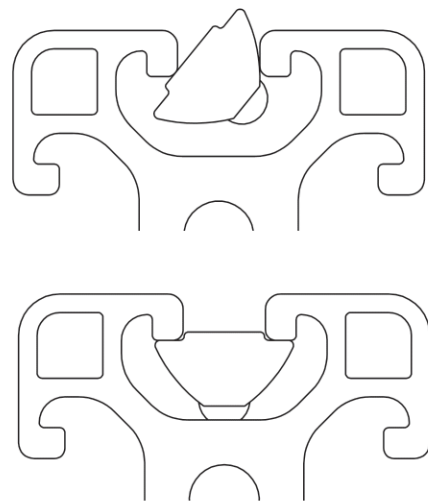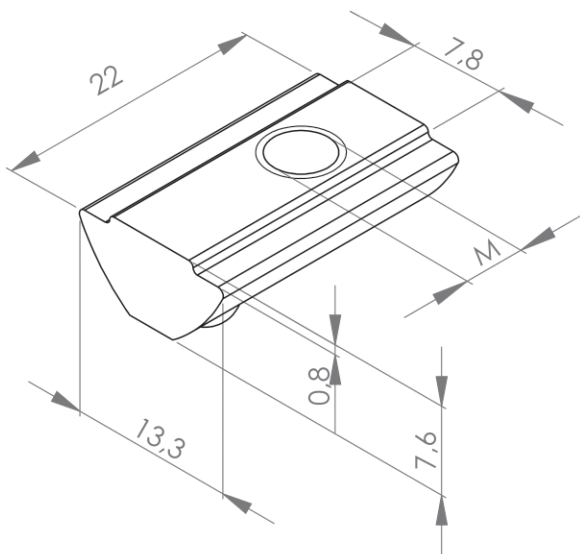

Positioning the T-slot nut

Description	Slot	M (mm)	Material	Weight (g)	ESD	Art. no.:
Swivelling T-slot nut 8 with ball and bar	8	M3	Steel, zinc-plated	11.4	-	355005
	8	M4	Steel, zinc-plated	11.0	-	355020
	8	M4	Steel, zinc-plated	11.0		355022
	8	M5	Steel, zinc-plated	10.5	-	355030
	8	M5	Stainless steel	10.5	-	355031
	8	M5	Steel, zinc-plated	10.5		355032
	8	M6	Steel, zinc-plated	9.9	-	355040
	8	M6	Stainless steel	9.9	-	355041
	8	M6	Steel, zinc-plated	9.9		355042
	8	M8	Steel, zinc-plated	8.9	-	355050
	8	M8	Stainless steel	8.9	-	355051
	8	M8	Steel, zinc-plated	8.9		355052