



SWIVEL CASTOR WITH BACK HOLE




Housing: Steel, zinc-plated, tread: Thermoplastic rubber, grey, trackless
Fastening kits can be found on p. 378

Swivel castor with and without locking device

Swivel bearing with double ball bearing ring, plain bearing and mounting hole. Standard screws can be used to attach the castors.

Can either be fixed in the slot or in the core pull of a profile

For applications in the temperature range from -20°C to 60°C

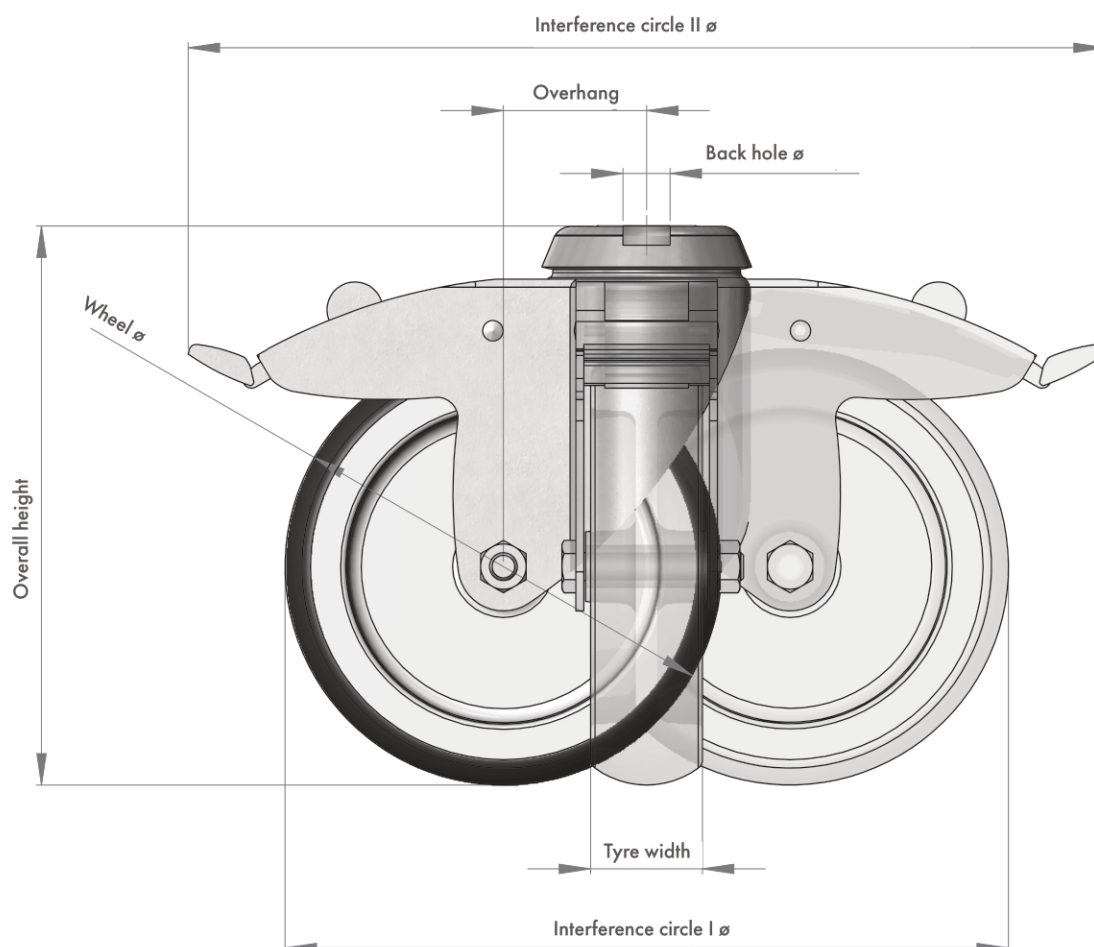

Description	Wheel Ø (mm)	Tyre width (mm)	Back hole Ø (mm)	Over- hang (mm)	Overall height (mm)	Inter- ference circle I Ø (mm)	Inter- ference circle II Ø (mm)	Load capacity dynamic	Load capacity static	Version	Weight (kg)	ESD	Art. no.:
Swivel castor Ø 75 with back hole Ø 11													
Swivel castor Ø75 with back hole Ø11	Ø 75	25	Ø 11	24	100	124	-	75 kg	150 kg	-	0.215	-	510190
Swivel castor Ø75 with back hole Ø11, conductive	Ø 75	25	Ø 11	24	100	124	-	75 kg	150 kg	-	0.222		510120
Swivel castor Ø75 with back hole Ø11 cpl. lockable	Ø 75	25	Ø 11	24	100	-	160	75 kg	150 kg	With full brake	0.267	-	510180
Swivel castor Ø75 with back hole Ø11 cpl. lockable, conductive	Ø 75	25	Ø 11	24	100	-	160	75 kg	150 kg	With full brake	0.273		510110
Swivel castor Ø 75 with back hole Ø13													
Swivel castor Ø75 with back hole Ø13	Ø 75	25	Ø 13	24	100	124	-	75 kg	150 kg	-	0.209	-	502121
Swivel castor Ø75 with back hole Ø13, conductive	Ø 75	25	Ø 13	24	100	124	-	75 kg	150 kg	-	0.215		502061
Swivel castor Ø75 with back hole Ø13 cpl. lockable	Ø 75	25	Ø 13	24	100	-	160	75 kg	150 kg	With full brake	0.266	-	502111
Swivel castor Ø75 with back hole Ø13 cpl. lockable, conductive	Ø 75	25	Ø 13	24	100	-	160	75 kg	150 kg	With full brake	0.271		502051
Swivel castor Ø 100 with back hole Ø11													
Swivel castor Ø100 with back hole Ø11	Ø 100	32	Ø 11	38	135	176	-	80 kg	160 kg	-	0.532	-	510220
Swivel castor Ø100 with back hole Ø11, conductive	Ø 100	32	Ø 11	38	135	176	-	80 kg	160 kg	-	0.543		510150
Swivel castor Ø100 with back hole Ø11 cpl. lockable	Ø 100	32	Ø 11	38	135	-	263	80 kg	160 kg	With full brake	0.716	-	510210
Swivel castor Ø100 with back hole Ø11 cpl. lockable, conductive	Ø 100	32	Ø 11	38	135	-	263	80 kg	160 kg	With full brake	0.761		510140
Swivel castor Ø 100 with back hole Ø13													
Swivel castor Ø100 with back hole Ø13	Ø 100	32	Ø 13	38	135	176	-	80 kg	160 kg	-	0.530	-	502126
Swivel castor Ø100 with back hole Ø13, conductive	Ø 100	32	Ø 13	38	135	176	-	80 kg	160 kg	-	0.541		502064
Swivel castor Ø100 with back hole Ø13 cpl. lockable	Ø 100	32	Ø 13	38	135	-	263	80 kg	160 kg	With full brake	0.714	-	502125
Swivel castor Ø100 with back hole Ø13 cpl. lockable, conductive	Ø 100	32	Ø 13	38	135	-	263	80 kg	160 kg	With full brake	0.759		502063
Swivel castor Ø 125 with back hole Ø11													
Swivel castor Ø125 with back hole Ø11	Ø 125	32	Ø 11	41	160	207	-	100 kg	200 kg	-	0.634	-	510224
Swivel castor Ø125 with back hole Ø11, conductive	Ø 125	32	Ø 11	41	160	207	-	100 kg	200 kg	-	0.634		510154
Swivel castor Ø125 with back hole Ø11 cpl. lockable	Ø 125	32	Ø 11	41	160	-	263	100 kg	200 kg	With full brake	0.814	-	510223
Swivel castor Ø125 with back hole Ø11 cpl. lockable, conductive	Ø 125	32	Ø 11	41	160	-	263	100 kg	200 kg	With full brake	0.809		510152
Swivel castor Ø 125 with back hole Ø13													
Swivel castor Ø125 with back hole Ø13	Ø 125	32	Ø 13	41	160	207	-	100 kg	200 kg	-	0.632	-	502140
Swivel castor Ø125 with back hole Ø13, conductive	Ø 125	32	Ø 13	41	160	207	-	100 kg	200 kg	-	0.632		502080
Swivel castor Ø125 with back hole Ø13 cpl. lockable	Ø 125	32	Ø 13	41	160	-	263	100 kg	200 kg	With full brake	0.812	-	502130
Swivel castor Ø125 with back hole Ø13 cpl. lockable, conductive	Ø 125	32	Ø 13	41	160	-	263	100 kg	200 kg	With full brake	0.809		502070