



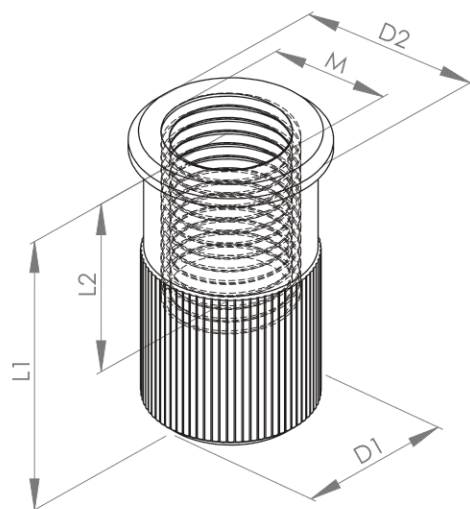

THREADED RODS

Material: steel, zinc-plated

- With Nut, low type (for fastening the threaded rod in position)
- Suitable for combination feet
- Available in many different versions
- Can be used in profile core pulls and in various base plates.

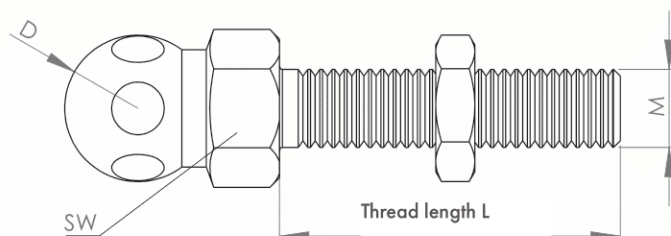

Suitable plates for configuring feet can be found on p. 361

Threaded rods	M (mm)	D (mm)	WAF (mm)	L (mm)	Material	Load ca- pacity (kg)	Weight (g)	ESD	Art. no.:
Threaded rod with ball M8x35	8	15	14	35	Steel, zinc-plated	350	34.5		501365
Threaded rod with ball M8x80	8	15	14	80	Steel, zinc-plated	350	48.7		501370
Threaded rod with ball M10x70	10	15	14	70	Steel, zinc-plated	470	56.8		501380
Threaded rod with ball M10x90	10	15	14	90	Steel, zinc-plated	470	66.9		501390
Threaded rod with ball M12x55	12	15	14	55	Steel, zinc-plated	770	61.8		501400
Threaded rod with ball M12x100	12	15	14	100	Steel, zinc-plated	770	94.1		501410
Threaded rod with ball M12x125	12	15	14	125	Steel, zinc-plated	770	110.4		501420
Threaded rod with ball M12x150	12	15	14	150	Steel, zinc-plated	770	129.1		501430
Threaded rod with ball M16x100	16	15	14	100	Steel, zinc-plated	1450	156.1		501440
Threaded rod with ball M16x115	16	15	14	115	Steel, zinc-plated	1450	179.5		501450
Threaded rod with ball M16x125	16	15	14	125	Steel, zinc-plated	1450	224.6		501455
Threaded rod with ball M16x150	16	15	14	150	Steel, zinc-plated	1450	189.1		501460

Threaded sleeves	M (mm)	D1 (mm)	D2 (mm)	L1 (mm)	L2 (mm)	Material	Weight (g)	Art. no.:
Threaded sleeve M12	12	17	20	32	20	Steel, zinc-plated	29.0	502185