



RE : Technical data - Données techniques - Technische Daten

WA 20 = 320 mm / WA 30 = 390 mm
SA 37 = 420 mm / SA 47 = 450 mm

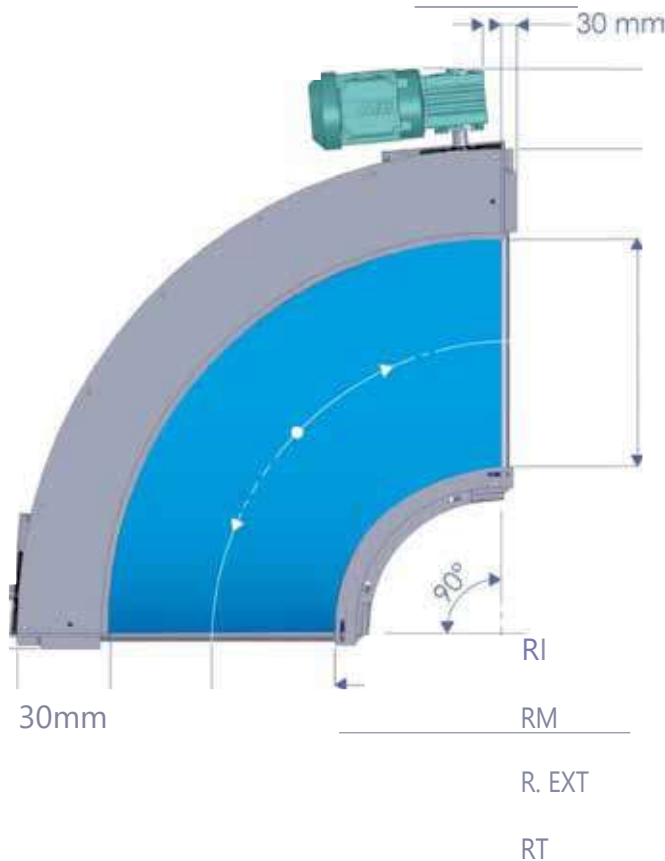


WA 20 = 175 mm / WA 30 = 200 mm
SA 37 = 200 mm / SA 47 = 200 mm

Usable width /
Largeur utile /
Nutzbreite

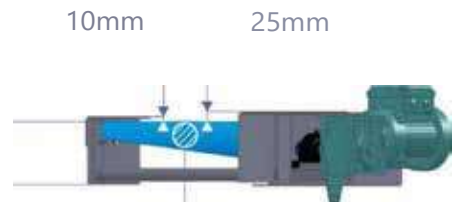

average Ø / Ø moyen / mittlerer Ø

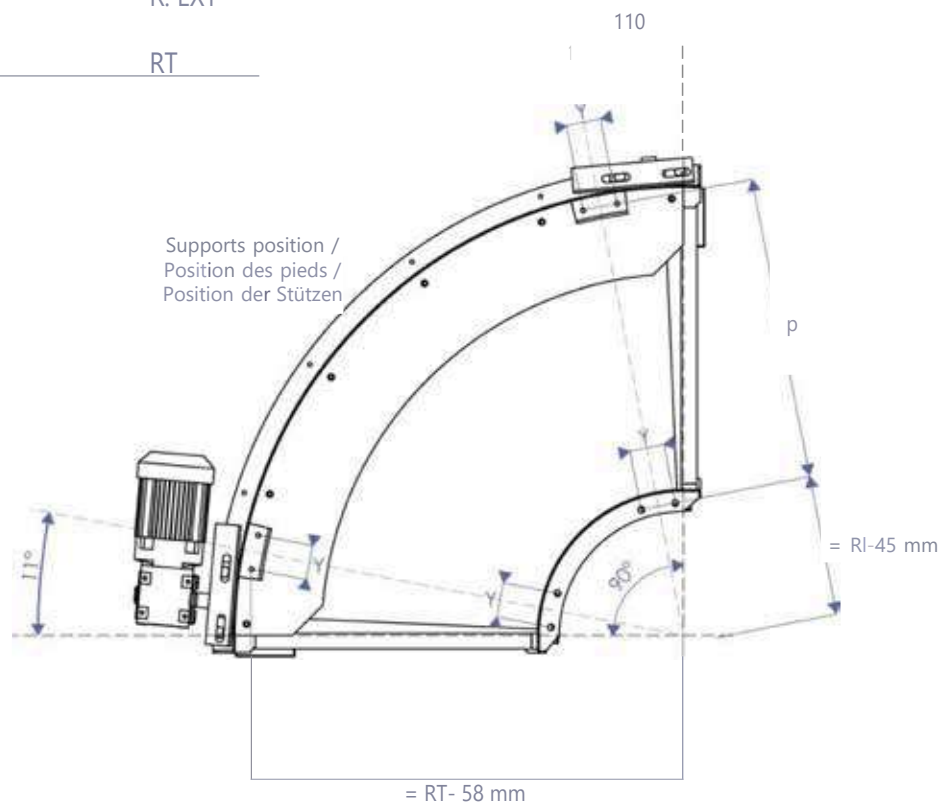

RE :

Technical data - Données techniques - Technische Daten

Type / Type / Typ	Size / Taille / Grösse	Belt width / Largeur utile / Gurtbreite (mm)	Angle / Angle / Winkel		Total outer radius / Rayon total / Gesamt Radius	Belt radius / Rayons bande / Gurt - Radius			Height / Hauteur / Höhe (mm)	Average Ø / Ø moyen / Mittlerer Ø (mm)	Supports / Pieds / Stützen				
											Drilling position / Entraxe / Lage			Tube section / Section tube / Querschnitt	
			Min.	Max.		RT (mm)	R.EXT (mm)	RM (mm)			RI (mm)	A	R (mm)	Y (mm)	Tube (mm)
REC	210	185	60°	180°	815	660	567,5	475	130	77	11°	757	60	35 x 35	327
	310	285	60°				517,5	375		70					427
	410	385	75°				467,5	275		65,5					527
PRE	210	190	30°	180°	1225	1060	965	870	133	91	11°	1167	90	35 x 35	342
	310	290	30°				915	770		86					442
	410	390	35°				865	670		81					542
	510	490	35°				815	570		76,5					642
	610	590	35°				765	470		72					742
IRE	310	290	30°	180°	1475	1310	1165	1020	175	117	11°	1417	90	60 x 30	442
	410	390	30°				1115	920		112					542
	510	490	30°				1065	820		107					642
	660	640	35°				990	670		100					792
	810	790	35°				915	520		92					942
REM	410	390	30°	180°	1705	1560	1365	1170	195	137	11°	1647	90	60 x 30	542
	510	490	30°				1315	1070		132					642
	660	640	30°				1240	920		125					792
	810	790	32°				1165	770		117					942
	1010	990	35°				1065	570		107					1142
AER	510	490	30°	180°	1975	1810	1565	1320	225	157	11°	1917	90	60 x 30	642
	660	640	30°				1490	1170		149					792
	810	790	30°				1415	1020		142					942
	1010	990	30°				1315	820		132					1142
	1210	1190	32°				1215	620		122					1342
GRE	510	490	28°	180°	2225	2060	1815	1570	272	210	11°	2167	90	60 x 30	642
	660	640	28°				1740	1420		202					792
	810	790	28°				1665	1270		193					942
	1010	990	28°				1565	1070		181					1142
	1210	1190	30°				1465	870		170					1342
	1510	1490	35°				1315	570		152					1642
HRE	1010	990	30°	90°	2975	2820	2320	1820	340	232	11°	2917	90	60 x 30	1142
	1210	1190	30°				2220	1620		222					1342
	1410	1390	30°				2120	1420		212					1542
	1610	1590	35°				2020	1220		202					1742
	1810	1790	35°				1920	1020		192					1942
	2010	1990	35°				1820	820		182					2142
ZRE		On request / Sur demande / Auf Antrag													