


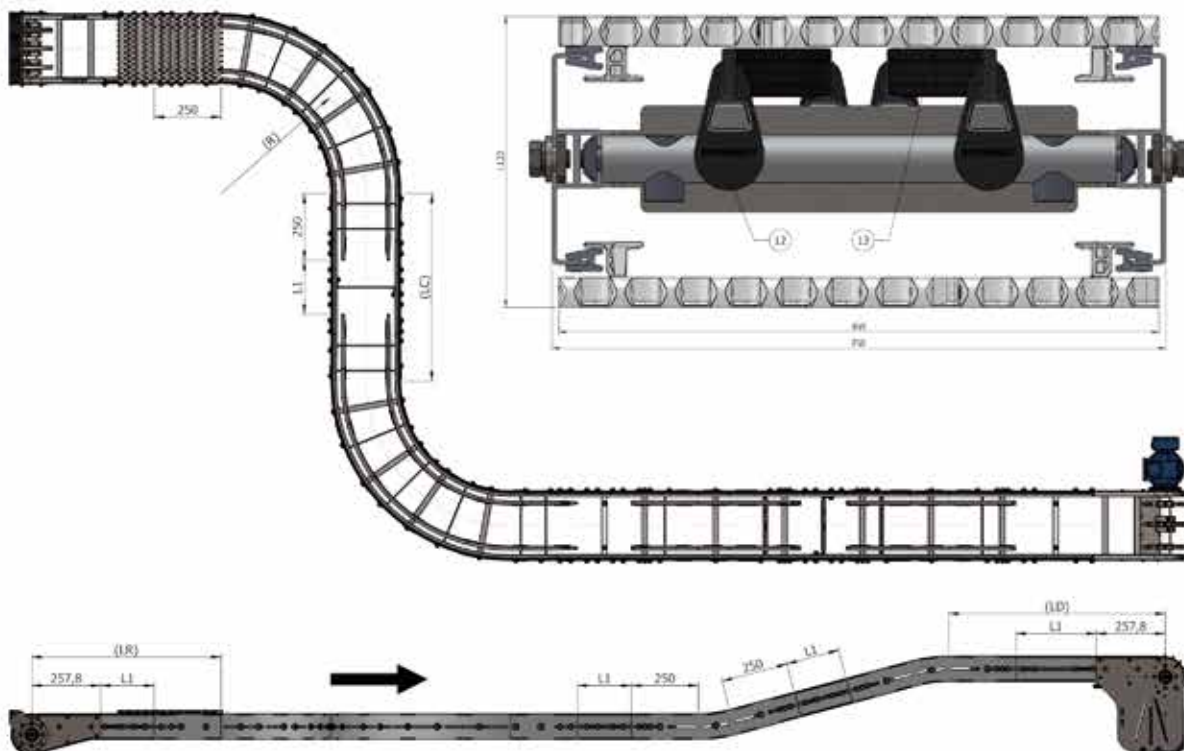

More technical information: See engineering online www.easy-conveyors.com

ETS HEAD DRIVE	Dimensions - Abmessungen - Dimensions - Dimensiones			
L =	Max. total +/- 22 mtr. 72.17 Foot			Longer on request
L1 =	Min. 200 mm 7,87" inch			
LR =	1 x BW - Min. 500mm 19,68" inch			
LC =	1.5 x BW			
LD =	1 x BW - Min. 800mm 31,49" inch			
FW =	260	344	429	513 mm
	10,23"	13,54"	16,89"	20,19" inch
BW =	255	340	425	510 mm
	10,04"	13,58"	16,73"	20,07" inch
R =	255=540, 340=750, 425=900, 510=1100 mm			
	10,04"=21,26", 13,58"=29,52", 16,73"=35,43", 20,07"=43,3" inch			
V ≈	Max. 45 mtr./min 148 Foot/min			
Max. Torque, Couple, Esfuerzo de torsion, Drehmoment				141 Nm
Breaking load, Bruchlast, Charge de rupture, Carga de rotura				30.000 N/mtr (dynamic)
Support legs, Stützen, Supports, Patas de apoyo				Module PAGE 392-401
Side guiding, Seitenführungen, Guidage latéral, Guiado lateral				Module PAGE 401-405
! POS 12 -13		When BW = 425/ 13,58" & 510/ 20,07" or Product Weight >10kg.		

Others on request, Andere auf Anfrage, Autres sur demande, Otros sobre consulta