
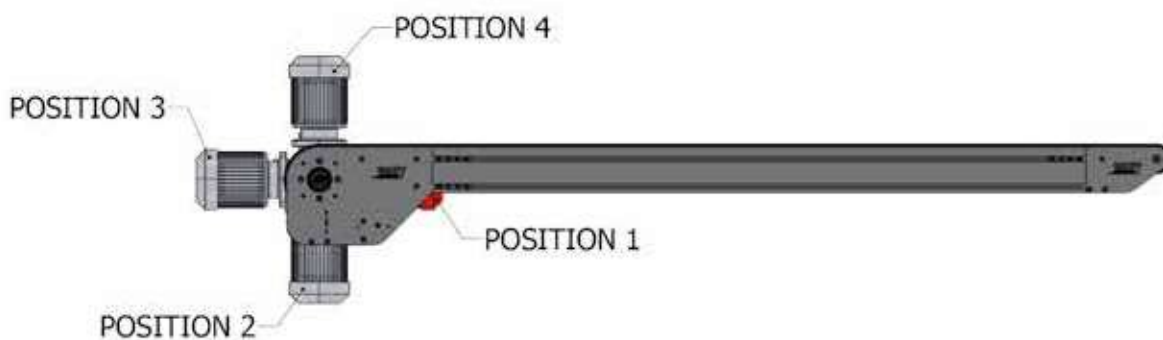


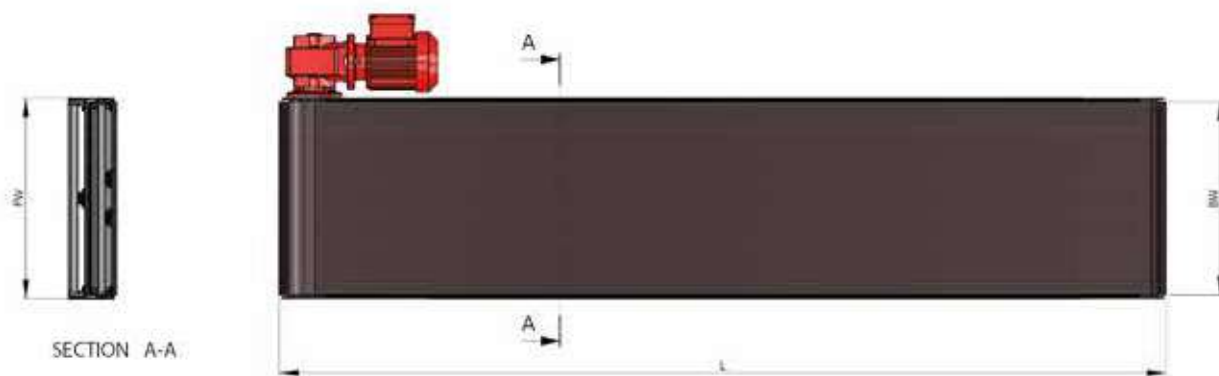

More technical information: See engineering online www.easy-conveyors.com

EMCS HEAD DRIVE	Dimensions - Abmessungen - Dimensions - Dimensiones						
L =	Individual von 785 - 22.000 mm 30,91 - 866,14" inch						
	All lengths in between possible						
FW =	186	271	356	441	528	698	868 mm
	7,32"	10,67"	14,02"	17,36"	20,79"	27,48"	34,17" inch
BW =	170	255	340	425	510	680	850 mm
	6,69"	10,04"	13,39"	16,73"	20,08"	26,77"	33,47" inch
V ≈	Max. 45 mtr./min 148 Foot/min (dry condition)						
Breaking load, Bruchlast, Charge de rupture, Carga de rotura						21600 – 35000 N/mtr	
Support legs, Stützen, Supports, Patas de apoyo						Module PAGE 468-477	
Side guiding, Seitenführungen, Guidage latéral, Guiado lateral						Module PAGE 478-481	

Others on request, Andere auf Anfrage, Autres sur demande, Otros sobre consulta