


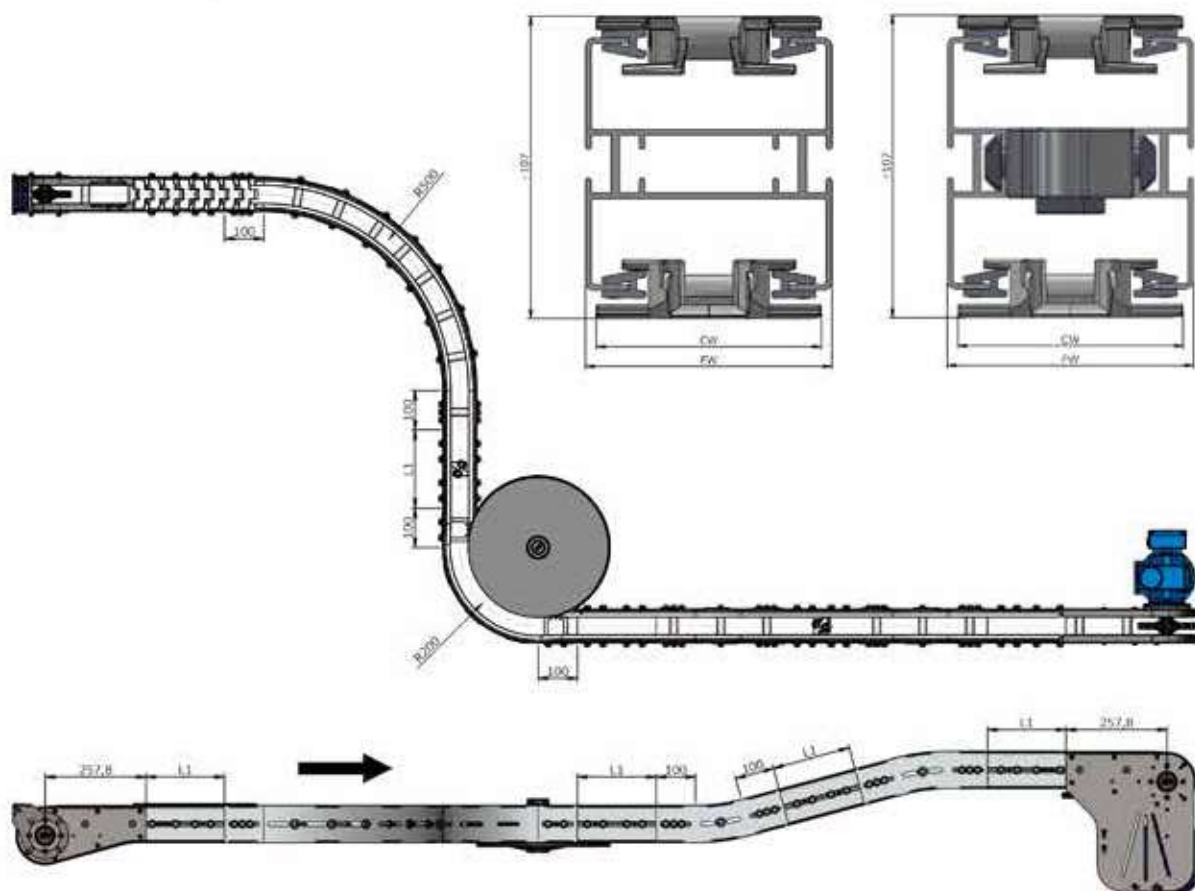

More technical information: See engineering online www.easy-conveyors.com

ETS HEAD DRIVE	Dimensions - Abmessungen - Dimensions - Dimensiones		
L =	Max. total +/- 30 mtr. 98.42 Foot		
	Longer on request		
L1 =	Min. 200 mm 7,87" inch		
FW =	87,5	147,5	207,5 mm
	3,44"	5,80"	8,17" inch
CW =	80	140	200 mm
	3,14"	5,51"	7,87" inch
V ≈	Max. 45 mtr./min 148 Foot/min		
Max. Torque, Couple, Esfuerzo de torsion, Drehmoment			141 Nm
Breaking load, Bruchlast, Charge de rupture, Carga de rotura			3000N (dynamic)
Support legs, Stützen, Supports, Patas de apoyo			Module PAGE 308
Side guiding, Seitenführungen, Guidage latéral, Guiado lateral			Module PAGE 320

Others on request, Andere auf Anfrage, Autres sur demande, Otros sobre consulta