


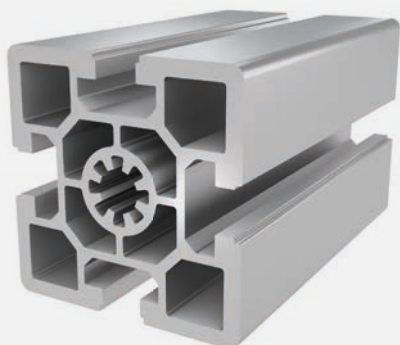


PROFILE 60x60 SLOT 10

Material: anodised aluminium

Technical data:

Surface A [cm ²]	14.40
Moment of inertia I _x [cm ⁴]	52.00
Moment of inertia I _y [cm ⁴]	52.00
Section modulus W _x [cm ³]	17.30
Section modulus W _y [cm ³]	17.30
Weight m [kg/m]	3.90

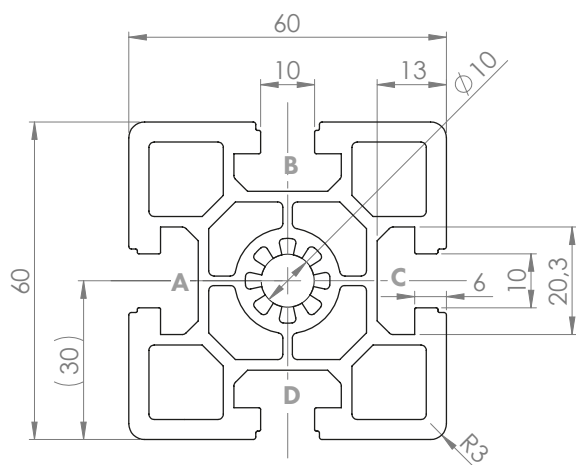

Standard processing:	Art. no.:
M12 / -	103300
M12 / M12	103305
M12 / D17	103335
M12 / M16	103310
M16 / -	103400
M16 / M16	103405
D17 / -	102500
D17 / D17	102505
D17 / D17V	102515
D9.8 / -	102300
D9.8 / D9.8	102305
D9.8 / D9.8V	102310
D9.8+ / D9.8+	102325


Explanations and further processing options can be found on p. 223-231

Dimensions (version)	Length (mm)	Slot	Weight (kg)	Art. no.:
60x60	Cut to length	10	3.9 kg/m	20105100
60x60	6060	10	3.9 kg/m	20105101

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

COVER CAP 60x60 SLOT 10

Material: PA plastic



Dimensions (version)	Slot	Weight (g)	Version	Art. no.:
60x60	10	14	Black	401070
60x60	10	14	Grey	401170