


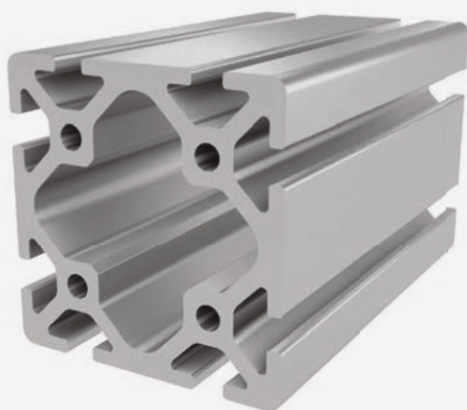


## PROFILE 6 60x60

Material: anodised aluminium

### Technical data:

|                                                     |       |
|-----------------------------------------------------|-------|
| Surface A [cm <sup>2</sup> ]                        | 13.30 |
| Moment of inertia I <sub>x</sub> [cm <sup>4</sup> ] | 53.80 |
| Moment of inertia I <sub>y</sub> [cm <sup>4</sup> ] | 53.80 |
| Section modulus W <sub>x</sub> [cm <sup>3</sup> ]   | 17.90 |
| Section modulus W <sub>y</sub> [cm <sup>3</sup> ]   | 17.90 |
| Weight m [kg/m]                                     | 3.55  |

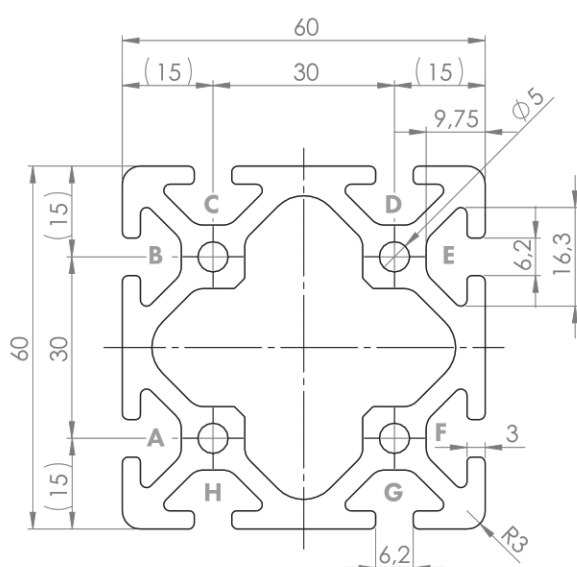

| Standard processing:  | Art. no.: |
|-----------------------|-----------|
| M6# / -               | 103159    |
| M6# / M6#             | 103153    |
| D5.8# / -             | 102092    |
| D5.8# / D5.8#         | 102098    |
| D5.8#+ / -            | 102103    |
| D5.8#+ / D5.8#+       | 102088    |
| D5.8# / -             | 102112    |
| D5.8# / D5.8#         | 102113    |
| D16#(Uni) / -         | 1020402   |
| D16#(Uni) / D16#(uni) | 1020407   |


Explanations and further processing options can be found on p. 223-231

| Dimensions (version) | Length (mm)   | Slot | Weight (kg) | Art. no.: |
|----------------------|---------------|------|-------------|-----------|
| 60x60                | Cut to length | 6    | 3.55 kg/m   | 20205400  |
| 60x60                | 6060          | 6    | 3.55 kg/m   | 20205401  |

If this profile is cut to length, the cutting costs incurred per saw cut must be factored in. (Art. no.: 101020)

## COVER CAP 6 60x60

Material: PA plastic



| Dimensions (version) | Slot | Weight (g) | Version | Art. no.: |
|----------------------|------|------------|---------|-----------|
| 60x60                | 6    | 2.2        | Black   | 421028    |